




**Manufacturers and distributors of sealing
and Jointing Materials**

DATA / SPECIFICATION SHEET

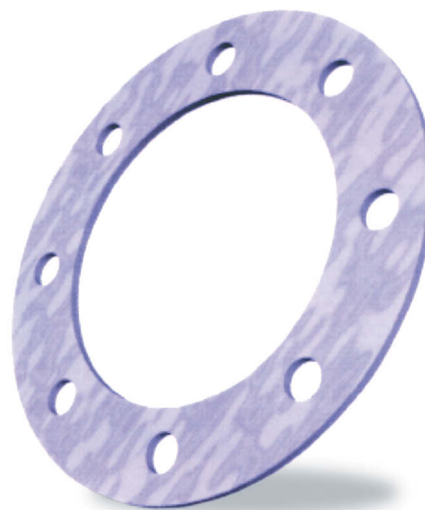

Colour - Blue

UNIFLON 50

DESCRIPTION

Novus Uniflon 50 is a superior performance biaxially orientated PTFE sheet sealing material with highly conformable properties, ideally suited to standard and irregular flanges.

SERVICE

Novus Uniflon 50 is specifically designed for use in low bolt loaded irregular flanges. Typical flanges include glass lined, ceramic, plastic coated or uneven and badly distorted flanges. It is suitable for sealing all chemicals across the whole pH range with the exception of molten alkali metals. (See chemical resistance chart for information)

APPROVALS / COMPLIANCE


Conforms with FDA21 CFR 177.1550 regulations.

AVAILABILITY

Thickness range = 0.75mm to 3.0mm
Standard sheet sizes = 1.0m x 1.0m, 1.5m x 1.0m, 2.0m x 1.0m, 1.5m x 1.5m, 2.0m x 1.5m, 2.0m x 2.0m.

TYPICAL PHYSICAL PROPERTIES

| | | |
|------------------|----------------|-------------|
| Thickness | | 1.5mm |
| Density | | 1.4g/cc |
| Tensile Strength | ASTM F152 | 11MPa |
| Compression | ASTM F36 | 40% |
| Recovery | ASTM F36 | 30% min |
| Residual Stress | BS7531 (175°C) | 25MPa |
| Creep Relaxation | ASTM F38 | 35% |
| Gas Permeability | DIN 3535 | <0.02cc/min |
| Liquid Leakage | ASTM F37 | 0.23ml/hr |

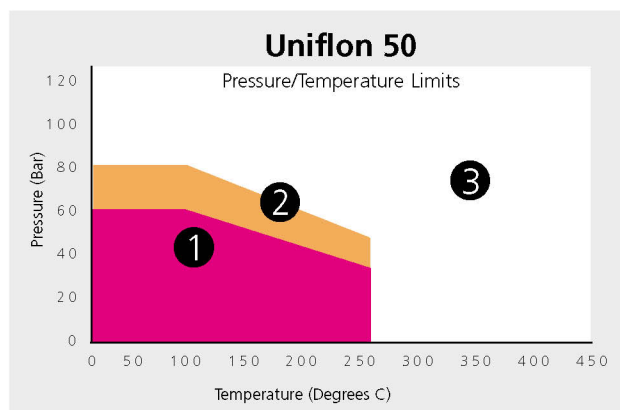

- 1** Suitable subject to chemical compatibility
- 2** Suitable in some cases but check your application requirements with Novus
- 3** Contact the Novus Technical Team for applications with higher temperatures and pressures. Applicable to 1.5mm and below.

The operating temperature of non-asbestos sheet material is related to the thickness of materials selected. Thinner materials give better temperature and pressure properties.

As the company's products are used for a multiplicity of purposes and as the company has no control over the method of their applications or use, the company excludes all conditions or warranties, expressed or implied by statute or otherwise, as to their products and/or their fitness for any particular purpose. Any technical co-operation between the company and the customer is given for customers assistance only and without liability on the part of the company.