



PF[®]-400

CABLE CLEANER



FEATURES

- High flash point of 142°F (61°C)
- Dielectric strength to 68 kV
- Excellent for splicing and termination applications
- Removes contaminants that can cause current leakage
- Removes semi-con residue and conductive particles
- Non-staining, non-corrosive, no residue
- SNAP approved
- Does not contain chlorinated solvents

PACKAGE

Net Fill

11 oz. (312 grams) aerosol

Part No.

62716

APPLICATIONS

- Cable Splicing
- Cable Termination
- Conductors
- Connectors
- Degreasing
- Generators
- Insulators
- Metal Contacts
- Motor Housings
- Semi-conductor jackets
- Switch Gear
- Transformers



PROPERTIES

Appearance/Physical State:

Clear liquid

Base Type:

Aliphatic Hydrocarbon

Boiling Point:

366°F – 406°F (186°C – 208°C)

Dielectric Strength:

68 kv

Evaporation Rate:

Moderate to slow

Flash Point: (TCC)

142°F (61°C)

HMS:

1, 2, 0

KBValue:

27

Odor:

Negligible

Propellant:

Carbon Dioxide

Specific Gravity:

0.77 @ 60°F (16°C)

Surface Tension:

25.1 dynes/cm @ 77°F (25°C)


VOC Content:

749 g/L




PF[®]-400 CABLE CLEANER


DIRECTIONS

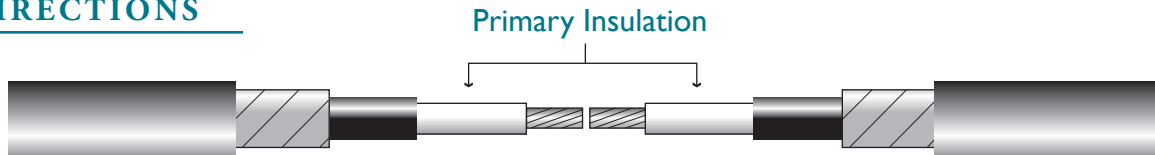

1. After the cable is cutback, abrade the primary insulation with non-conductive, aluminum oxide, abrasive cloth to remove any imbedded semi-con and conductive particles.

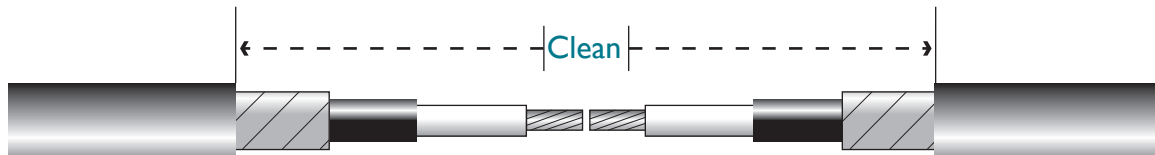

2. Apply PF[®]-400 Cable Cleaner to a clean lint-free cloth and wipe the length of the exposed cutback area to remove contaminants. Wipe the cleaned area dry with a lint-free cloth.

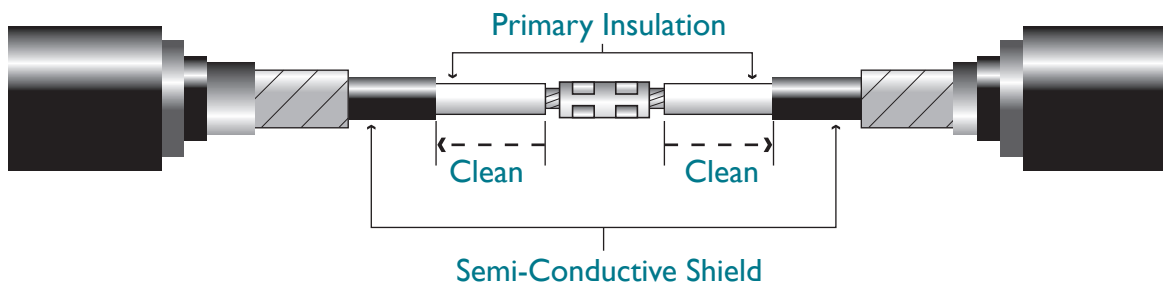

3. Apply PF[®]-400 Cable Cleaner to a clean lint-free cloth and remove all the remaining semi-conductive and conductive particles on the primary insulation by wiping from the insulation edge back toward the semi-conductive shield. Wipe the primary insulation dry with a lint-free cloth.

MATERIAL COMPATIBILITY

Materials	Compatible? YES/NO	Materials	Compatible? YES/NO	Materials	Compatible? YES/NO
ABS	Y	Lusterless Polyurethane	Y	Polystyrene	N
Acrylic Type A	Y	Natural Rubber	N	Polysulfide	Y
Acrylic Type C	Y	Neoprene	Y	Polyurethane	Y
Enamel	Y	Nitrile	Y	PVC	Y
Epoxy	Y	Phenolic	Y	Semi Gloss Polyurethane	Y
Ethylene Propylene	Y	Polycarbonate	Y	Silicate	Y
Fiberglass (Epoxy Polyester)	Y	Polyethylene (LDPE, HDPE, XLPE)	Y	Silicone	Y
High Gloss Polyurethane	Y	Polyphenylene Oxide	Y	Viton	Y
Hypalon	Y	Polypropylene	Y		

LPS Laboratories • An Illinois Tool Works Company

P.O. Box 105052 • 4647 Hugh Howell Road • Tucker, GA 30085-5052 • TEL: (800) 241-8334 or (770) 243-8800 • FAX: (800) 543-1563 or (770) 243-8899

Internet Web Site: www.lpslabs.com

©2009 LPS Laboratories • LPS[®], PT[®] and PF[®] are registered trademarks of Illinois Tool Works • Printed in U.S.A. • All Rights Reserved • Form #2212 • Rev. 2/2009